

Intelligent Video Analysis at Edge IP-30 Camera Series



STARVIS 5MP IR BULLET IP CAMERA

IP-30301LBO





About the Camera: IP 30 Series cameras are Artificial Intelligence powered latest camera series by Wavesys. It is built on advanced system-on-chip technology from California based company Ambarella and Sony Starvis Sensors. The IP30 series cameras are integrated with Wavesys Open Platform Enterprise Level Video Management Software WVMS. Wavesys is a video-based business intelligence leader with deep knowledge of different applications of intelligent video across distinct verticals.

Key Features

- 30fps at 5MP
- True Day/Night and WDR
- WaveVCA*: Intelligence built-in Camera Analytics
- Power over Ethernet (IEEE 802.3af)
- UL, CE, FCC, BIS & RoHS Certification
- · H.265, H.264 and MJPEG compression
- WaveStream: Smart Compression Technology based on bit rate Control, ROI
- IP67 and IK10 Environmental Housing

Application













Key features of WVMS



WVMS Professional - Monitoring Console



WVMS Video Content Analytics



WVMS Enterprise - Wall & Redundancy



WVMS License Plate Recognition



WVMS Facial Recognition Module



WVMS Mobile Application

Specification

Model	IP- 30301LBO
Image Sensor	SONY STARVIS EXMOR 1/2.8" 5M CMOS
Effective Pixels	2592(H) x 1944(V)
Scanning System	Progressive scanning
AGC Control	Auto
IRIS Type	Auto Exposure
Minimum Illumination	Color: 0.1 Lux / BW: 0 Lux(IR LED On)
Lens	4.0 mm, F2.0
Angle of View	Horizontal: Approx. 82.3° Vertical: Approx. 58.8°
Shutter Time	Auto / Manual: 1/30 ~ 1/32,000, Anti-Flicker, Slow Shutter (1/2,1/3,1/5,1/6,1/7.5,1/10)
Day & Night	True Day & Night (Removable IR-cut filter)
Wide Dynamic Range	True WDR,120 dB
Smart Capture Technology	Wave capture: smart advanced wide dynamic capture
	for high details in challenging conditions
S/N Ratio	50 dB
IR ILLUMINATOR	
IR LED	High Power IR LED x 2
IR Working Distance	25m Depend upon object size
Smart IR	WaveIR : Advanced Smart IR
VIDEO	
Video Compression	H.265, H.264, MJPEG
Profile	H.264: MP / HPH. 265: MP
Multiple Profile Streaming Performance	2592x1944/30 + 480p30 with H.264,H265 + MJPEG
Max Resolution	2592 x 1944
Video Bit Rate	100Kbps ~ 10Mbps
	Multi-rate for Preview and Recording
Bitrate Control	Multi Streaming CBR/VBR
	(Controllable frame rate and Bandwidth)
Digital Noise Reduction	3D-DNR
	55. TO 100
Privacy Mask	16 programmable zones
Special Features	Wavestream:Smart Compression Technology based on Bitrate Control- Region of Interest
Other Image Processing	Configurable Exposure, White Balance, Sharpness
Image Orientation	Flip / Mirror / Corridor Mode

AUDIO

AUDIO	
Audio Compression	N/A
Audio Input/output	N/A
EVENT	
Event Trigger	Motion, Temperature critical
Pre-Post Recording	Pre: 1~5 sec Post: 1~240 sec
Smart Edge Analytics	WaveVCA: Intelligence built-in Cameras Analytics
Event Notification	FTP, E-mail, SD card
NETWORK	
Ethernet Standard	10 / 100 Base-T
Protocol	TCP/IP, UDP, AutoIP, RTP(UDP/TCP), RTSP, NTP, HTTP, HTTPS, SSL, DNS, DDNS, DHCP, FTP, SMTP, ICMP, SNMPv1/v2/v3(MIB-2), ONVIF
Security	HTTPS(SSL), IP filtering, 802.1x, Digest Authentication
Plug In	ONVIF Profile S, CGI API
GENERAL	
Material	Aluminum Die-casting
External I/O Terminals	N/A
Power Source	DC12V, PoE(IEEE 802.3af)
Power Consumption	DC 12V Max 6.5W , PoE Max 8.3
Operating Conditions	Humidity 10 ~ 90% RH (non-condensing) [DC12V / PoE] -30°C ~ 50°C (-22°F ~ 122°F)
Approval	FCC, CE, IK09, BIS, ROHS
Weight	0.5 kg
Dimensions(D X W)	163 mm x 67.5 mm
EDGE STORAGE	
Storage	1x MicroSD/microSDHC (card not included)





WaveVCA: Intelligence built-in Cameras Analytics

Basic features

an object

Analytics Engine WVCA Technology's advanced tracking algorithm with rich library of detection behaviors

Detection Zones and Rules 40 zones
(Multi-segment Polygons and Lines) in total,
60 rules in total as standard
Intrusion Detection Detection of the presence of

Tamper Detection Supported as standard



Intrusion Detection



Tamper Detection



Zones & lines

Optional features

Detection Behavior Enter, Exit, Appear,
Disappear, Stop, Direction, Dwell filter,
Abandoned/Removed object filter, Tailgating
Logical Rules Extends standard rules
to allow various combinations of the inputs
3D Behavior Perspective Corrected Size and
Speed Filters

Object Classification - Configured

Max./Min. object sizes and Max./Min. speeds

Counting Line High accuracy people and

vehicle counting, 20 counters in total

Meta Data JSON format, Plain XML format





Dwell Filter

≒ Stopped Filter





























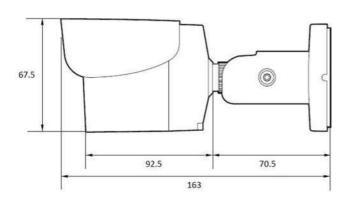



ACCESSORIES



BJC07